



FEATURES

Compact Design
Hand Cutting
Up to 2" 4SP Hydraulic Hose
CE Approved

OPTIONS

12/24V DC
Toothed blade
110V/220V 1 Phase
230V/440V/480V 3 Phase

C300

TECHNICAL DATA


Max. hose size (inch) ¹⁾	2
Diameter (blade) external (mm)	300
Diameter (blade) internal (mm)	50
Max. hose OD (mm)	80
Exhaust outlet OD (mm)	60
Motor Power (KW) ²⁾	3.0(400V 3 Phase)
Motor Power (HP) ²⁾	4.0

DIMENSIONS (LxWxH)		WEIGHT	
Machine (mm)	450x400x430	Machine (kg)	55
Machine (inch)	17.7x15.7x16.9	Machine (lbs)	121
Packaged (mm)	650x700x780	Packaged (kg)	75
Packaged (inch)	25.6x27.6x30.7	Packaged (lbs)	165

1) Hydraulic hose, 1-2 wire / 4 wire
2) 3-phase / 1-phase

STANDARD FEATURES

Smooth blade

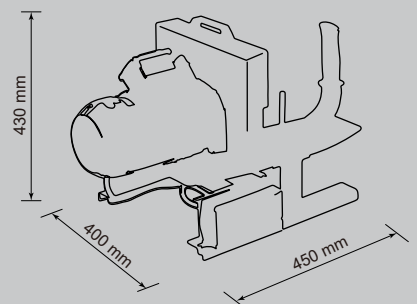

Products images & Specifications may alter prior official notice at any time.



FEATURES

- Compact Design
- Hand Cutting
- Up to 2" 4SP Hydraulic Hose
- CE Approved

OPTIONS

- 12/24V DC
- Toothed blade
- 110V/220V 1 Phase
- 230V/440V/480V 3 Phase

C300

TECHNICAL DATA

Max. hose size (inch) ¹⁾	2
Diameter (blade) external (mm)	300
Diameter (blade) internal (mm)	50
Max. hose OD (mm)	80
Exhaust outlet OD (mm)	60
Motor Power (KW) ²⁾	3.0(400V 3 Phase)
Motor Power (HP) ²⁾	4.0


DIMENSIONS (LxWxH)

WEIGHT

Machine (mm)	450x400x430	Machine (kg)	55
Machine (inch)	17.7x15.7x16.9	Machine (lbs)	121
Packaged (mm)	650x700x780	Packaged (kg)	75
Packaged (inch)	25.6x27.6x30.7	Packaged (lbs)	165

STANDARD FEATURES

Smooth blade

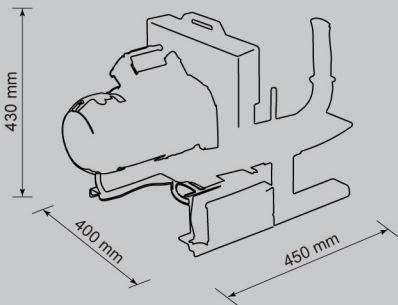

1) Hydraulic hose, 1-2 wire / 4 wire
2) 3-phase / 1-phase

Products images & Specifications may alter prior official notice at any time.